




Product Code	IAS-WHT-79953BIPP	Type:	Wall Hung WC
Colour:	White	Material:	Ceramic - Vitrous China
Outlet	Horizontal		
Technical Details:	Internal diameter of inlet hole dia. Ø 55 ± 3 mm		
	External diameter of outlet hole dia. Ø 100 ± 5 mm		
PRODUCT SPECIFICATION			
Rated Supply	220v-240v-50-60Hz	Dimension	405x600x480 mm
Rated Power	1250W - 1300W	Net Weight	41 Kg
Water Connection Cross section	Water pipe supply, G3/8thread	Shower Function	
Flushing water capacity	3.0L - 6.0L	Rear Wash shower flow	350-1000m l/ Min
Outlet Distance Floor Lvl.	230 c/c	Feminine Wash shower flow	350-1000m l/ Min
Installation Mode	Blind Installation	Heating	Instant heating
Inlet mode	Connect water pipe	Safety Device	Anti scaling and dry burning by temperature controller, sustaining valve, NTC and thermal fuse
Flushing mode	Fall to rush	Toilet Seat Heating	
Flushing way	Manual flush/ Auto flush.	General Heater Power	35W
Drainage way	Wall exhaust	Safety Device	Temperature controller ,NTC and thermal fuse
Water pressure range	0.07MPa-0.75Mpa	Dry	
Operating temperature range	8-35°C	Wind Speed	≥ 4m/s
Black flow prevention	Anti siphon,Backflow prevention	General Heater Power	200W
Seat cover	PP Seat Cover	Safety Device	Temperature controller ,NTC and thermal fuse
ACCESSORIES PROVIDED			
Remote		Remote Control	
ACCESSORIES EXCLUDED			
Control Plate		ACP-ROG-5012501	
Concealed Cistern		APC-WHT-5012500FSAF	
CERTIFICATION			
Compliance : IS 2556.2:2004/IS 2556.1:1994, EN 997 :2012+A1, CE			
All technical dimensions are in accordance to British standards. Bureau of Indian Standards			
 			

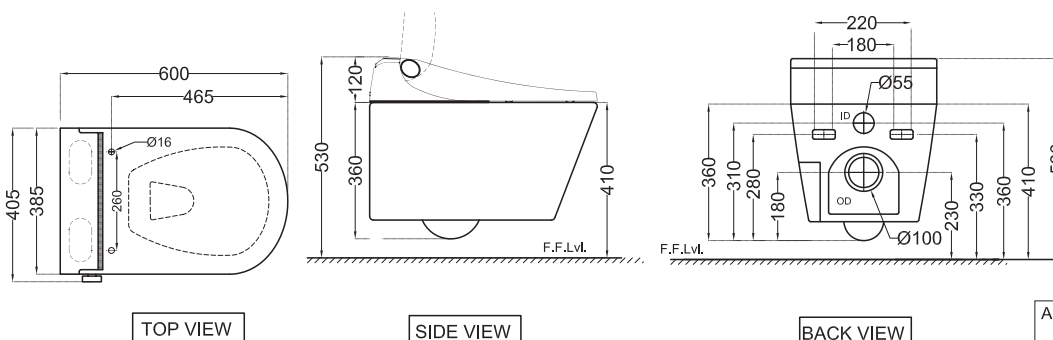

ALL DIMENSIONS ARE IN MM.
(TOLERANCE ± 5 MM)