
Ärtıze

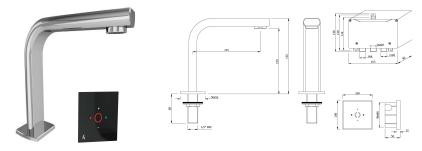

ITP-CHR-505011B	
i-Tap Basin Mixer, Deck Mounted	
• CPU, • Touchpad, • Power Supply System with CPU Cable, • Touchpad Cable - 1meters, • Braided	
Hoses 18" - 03 Nos, • NRV Set in-Built - 02 Nos, • Filter - 02 Nos, • Touchpad mounting box, •	
Metallic clamp & screw	
Hot & Cold (2 inlets)	
5 °C - 65 °C	
1/2"BSP (15mm)	
1.5 Bar - 5.0 Bar (Dynamic)	
3.0 Bar (Dynamic)	
DJUSTABLE FLOW aximum-13.0 LPM	
	Minimum-2.0 LPM @ 3 Bar with regular Aerator
10 Minutes	
Brass Ingots as per IS:1264-1997 Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder) osition	
	Brass Rod as per IS:319-1989
	Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder)
	r ass Sheets as per IS:410-1977 u (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder)
IP53	
IP65	
10 bar (Pass)	
15 bar (Pass)	
WRAS, ACS Approved (M24X1)	
Plating: Nickel-13.0 micron Chromium-0.40 micron	
Spray (700 hrs + Validated)	
Adhesion (Pass)	
ique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Black Matt (BLM), Graphite	
(GRF) & Stainless Steel Finish (SSF)	
(GRF) & Stainless Steel Finish (SSF) s been made to ensure factual accuracy, the information presented subject to changes due to	
· · ·	