



TOP VIEW

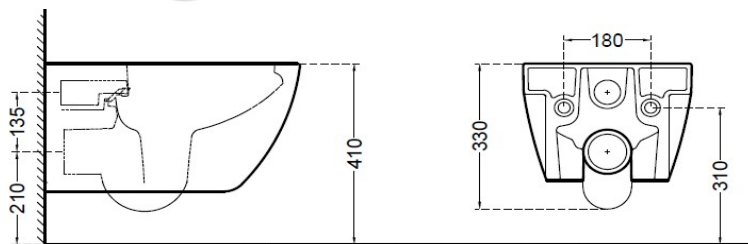

SIDE VIEW



BACK VIEW

GENERAL INFORMATION

Product Code	LXS-WHT-67953NBIUFM
Brand	Artize
Colour	White
Type	Wall Mounted WC
Material	Vitreous China (VC)

PRODUCT SPECIFICATION

Product Dimension	365x525x330 mm
Bowl Opening (Inner Dimension)	270 X 300 mm
Product Net Weight	24.0 Kg
Product Gross Weight	28.5 Kg
Packaging Dimension	435x470x550 mm
Outlet	Horizontal
Inlet Hole And Outlet Hole Dimension	Internal diameter of inlet hole dia. $\varnothing 55 \pm 3$ mm
	External diameter of outlet hole dia. $\varnothing 100 \pm 5$ mm
	Vertical distance between the Floor and the center line of the waste outlet hole ≤ 210 mm

PRODUCT FEATURES

Rimless WC with Blind Installation, UF Soft Close Slim Seat Cover, Dual Flush - 4.5/3 LPF, Anti Bacterial Seat Cover and Glaze, Exclusive Design, Inspired by Beautiful contradiction of Sharp, Modern Lines and Classic Arches.	<p>(L) From wall tile surface to center of seat cover fixing hole</p> <p>(La) WC Fixing wall thickness</p> <p>(Lb) From wall tile surface to the inner bowl surface of WC</p>	
--	--	--

ACCESSORIES PROVIDED

UF Soft Close Seat Cover	LXS-WHT-67103
Fixing kit	ZPS-WHT-FB13

ACCESSORIES RECOMMENDATION

Rack bolt	ZPS-SNS-RB07N
Concealed cistern	JCS-WHT-2400S, 2400P, 2400, 2400WS, 2400WP, 2400FS, 2400FP, 2431P, 2431FP, 2431, 2431S, 2431FS

CARE AND CLEANING GUIDELINES

→ Vitreous china sanitaryware products are fragile in nature and need to be handled with care (to avoid personal injury) at all times during its storage, handling, installation and use thereafter.
→ The product is heavy and it is recommended that two persons hold it while it is being fixed.
→ Carefully inspect the new product for damage before installation. Recommended to inspect the sanitaryware with wooden Hammer.
→ Risk of product damage. Over tightening may cause breakage or chipping of vitreous china. Recommended to use hard rubber & nylon spacer in between ceramic & metal fixtures.
→ Risk of external leakage. Do not lift or rock the bowl after placement.
→ Always test your cleaning solution on an inconspicuous area on the product before applying it to the entire surface.
→ Do not allow cleaners to sit or soak on the product.
→ Use a soft, dampened sponge or cloth to clean. Never use abrasive material like a bristle brush or scouring pad.
→ Wipe surfaces clean and rinse completely with water immediately after applying cleaners.
→ Clean Chrome, stainless steel surfaces once a week. Do not use cleaners containing chloride on chrome, stainless steel. If used, rinse the surface immediately to prevent corrosion.
→ Wherever chrome plating is used on the products, use only warm water to clean and then dry with a soft cloth.
→ Recommended to use Genuine Accessories.

QUALITY MANAGEMENT SYSTEM - ISO 9001

"DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. All dimensions are in mm (Tolerance ± 5 MM). Jaquar reserves the right to make the necessary amendments at any time without prior notice.

For Installation Refer Actual Product.Last modified on 07 April 2025.