









INSTALLATION GUIDE

Single Lever 1-Hole Bidet Mixer with Popup Waste System with 375mm Long Braided Hoses Range:VIC




Requirements:-


- 1) **Pressure** :- 3 bar to 4 bar (Ideal Working Pressure)
- 2) **Pipe Lines** :- 2 lines for hot & cold inlet (15 mm/ 1/2" BSPP)
(Hot & Cold water pressure to be balanced for optimum results.)
- 3) **Installation** :- Deck Mounted
- 4) **Operation** :- Single lever
- 5) **Connection** :- Braided hoses for hot & cold inlets

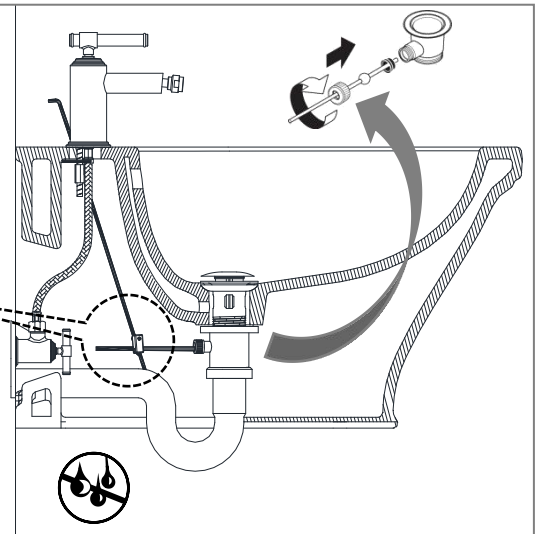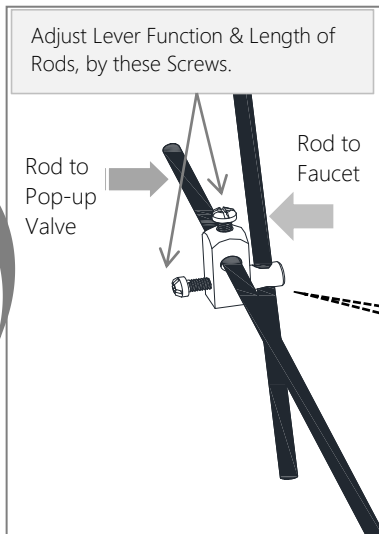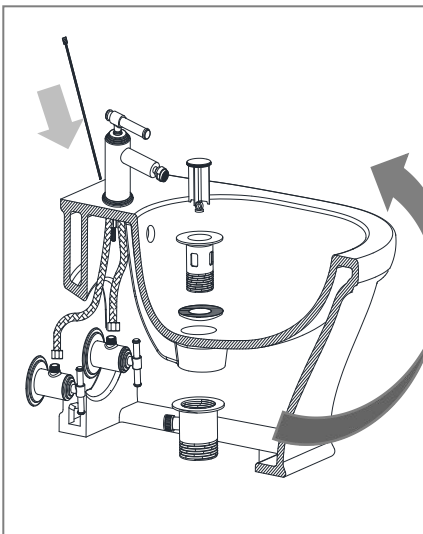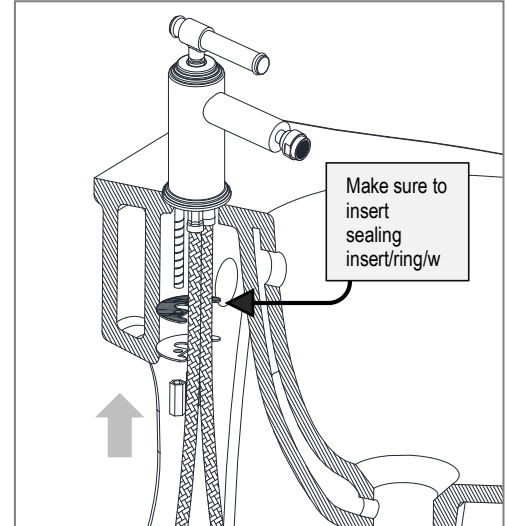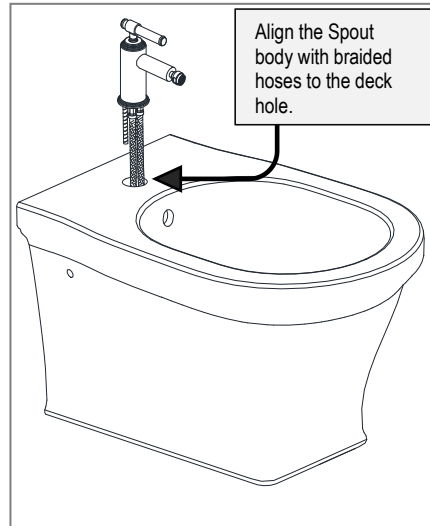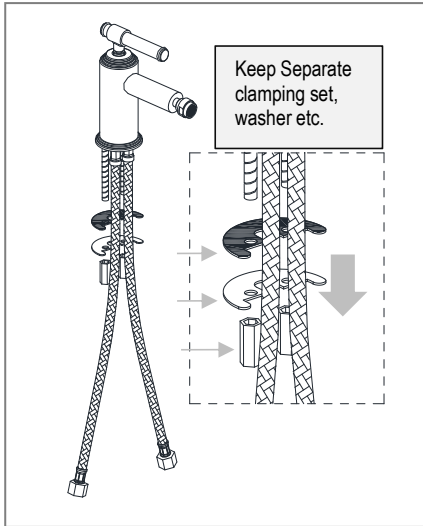

Pop-up Waste function:-

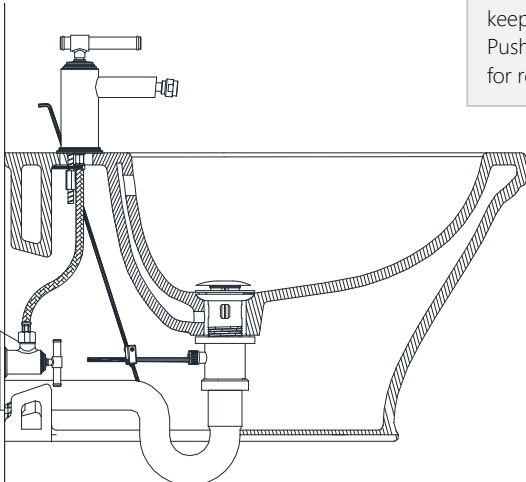


Pull lever to release
keep water into pot &
Push lever down side
for release water.

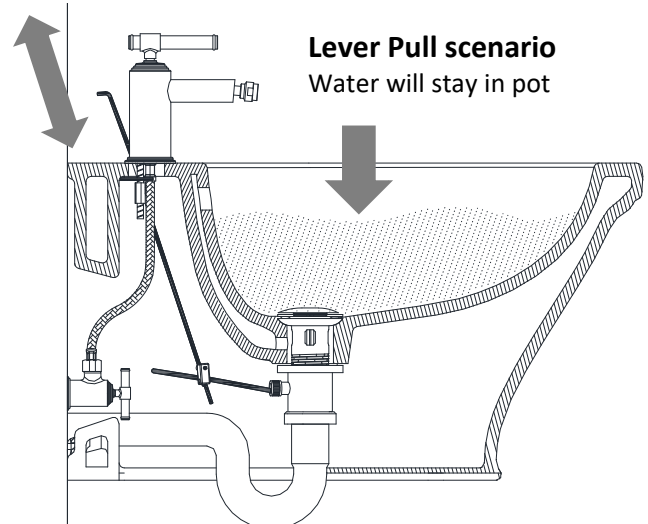



HOW TO OPERATE:-

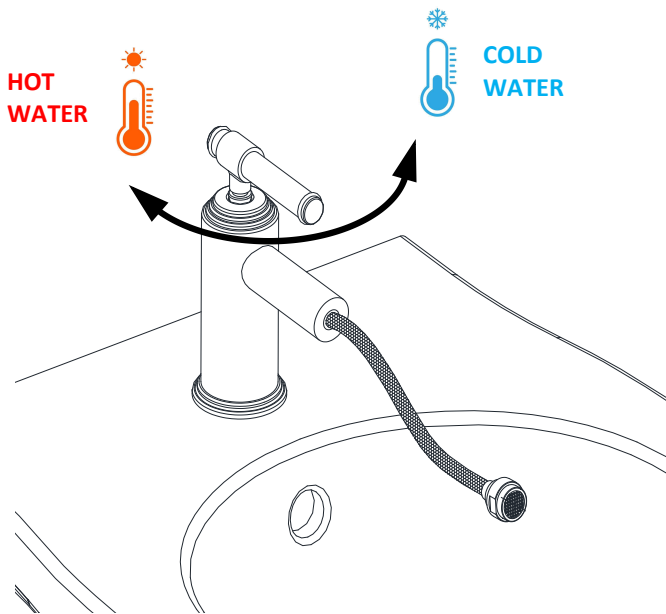

Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap solution with a neutral pH (around 7). Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap. This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting. This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:


It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

Safety Tips :-

- ❖ Make sure no loose fitting, Check for Leakage before final fittings.
- ❖ Keep water connection off during hose connection, avoid bending or twisted condition in hoses.
- ❖ Maintain desire water pressure to get conventional output.
- ❖ Don't use any metal/hard bristle scrub while cleaning .
- ❖ Don't push fittings forcefully, can lead to damage or crack.

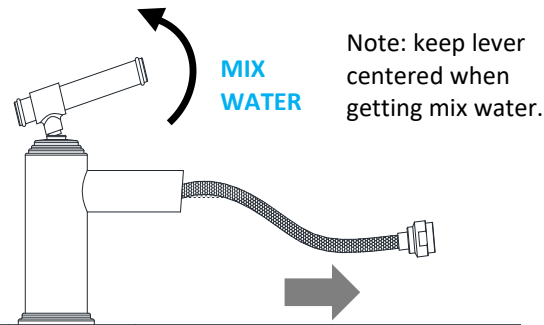

Note: keep lever centered when getting mix water.

Hose can be extend as per user requirement.

Note: Hose Can be extend within a limited range.

Troubleshooting

(A) Flow related

Problem	: -	Reduced Water Flow.
Cause	: -	Blocked/Clogged cartridges/aerators.
Remedy	: -	Remove the aerators, cartridges clean it thoroughly.

(B) Leakage

Problem	: -	Water Leakage
Cause	: -	Damaged/Broken/Worn out O-rings, brass nuts not tightened
Remedy	: -	Remove & Replace the defective O-rings. Or Tighten the brass nuts firmly

(C) Operation

Problem	: -	Lever Hard To Operate
Cause	: -	Clogged Cartridges (Silt, Dirt, Calcium Deposits etc.)
Remedy	: -	Remove the cartridges clean it thoroughly with water/vinegar.

For Non
Chrome
Surface

For
Chrome
Surface



Recommended Cleaning:-
Twice in a Week.