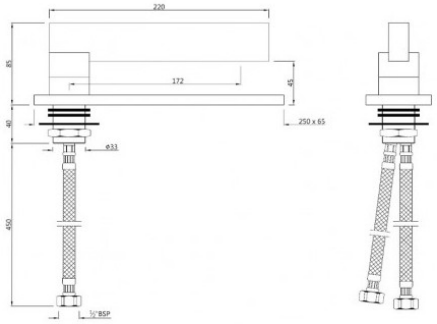

| | |
|---|---|
| **Product Code** | LIN-CHR-71011B |
| **Description** | Basin Mixer without Popup Waste System with 450mm Long Braided Hoses |
| **Connection Size** | Braided hoses, 1/2" FIP (WRAS Approved)<br>Withstand pressure of 10 Bar |
| **Flow Rate** | 5.95 LPM @ 3 bar |
| **Recommended Water Pressure** | 1.0 Bar - 5 Bar |
| **Brass Specification in Percentage** | **Brass Ingots as per IS:1264-1997**<br>Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)<br><br>**Brass Rod as per IS:319-1989**<br>Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder) |
| **Cartridge Specification** | Cartridge with Brass Spindle<br>Life Cycle EN 817: 70,000 cycles (Standard)<br>- 2.1 LAC Cycles as per EN 817*<br>- 10.5 LAC Cycles (ON/OFF)* |
| **Water Tightness** | 16 bar (Pass) |
| **Pressure Resistance** | 25 bar (Pass) |
| **Finish** | Plating: Nickel-13.0 micron Chromium-0.40 micron<br>Salt Spray (600 hrs + Validated)<br>Adhesion (Pass) |
| **Available Colour Finishing** | Antique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Blush Gold Bright PVD (BGP), Black Matt (BLM), Black Pearl PVD (BLP) Gold Bright PVD (GBP), Gold Matt PVD (GMP), Graphite (GRF) & Stainless Steel (SSF). |
| * As per in-house testing done on automatic life cycle testing machine made by Giussain, Italy | |
| DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice. | |